



Nanofiber Electrostatic Filtration Media


eSpin's all synthetic air filtration media utilize a fine layer of nanofibers to provide mechanical filtration while maintaining a low resistance to air flow. The unique hybrid structure allows to maintain the desired MERV rating throughout the filter life.

Applications

- HVAC
- Cabin Air
- Turbine Intake

Features

- Extended surface area
- High dust holding capacity
- High stability even at high relative humidity
- Meets ASHRAE 52.2 standard
- Durable synthetic construction
- Rolls in 900 linear feet

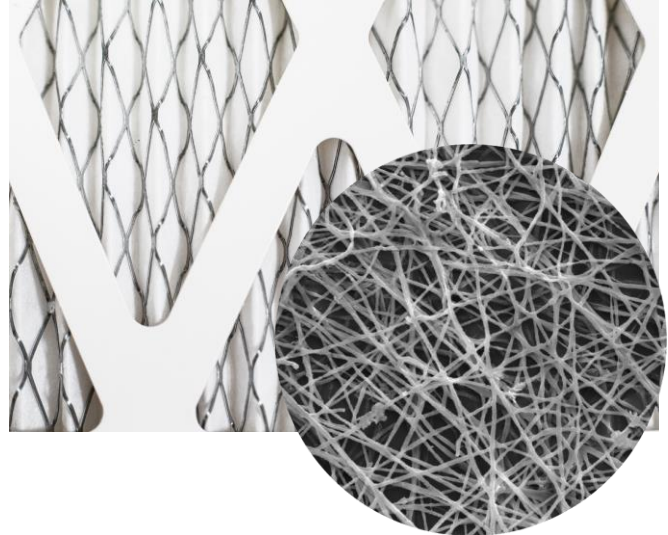


Technical Data Sheet

MERV 13e					
Properties	English Units		Metric Units		Test Methods
Basis Weight	4.39 ± 0.06	Oz/yd ²	104 ± 1.5	gsm	A.S.T.M. - D 646
Thickness	0.06 ± 0.01	In	1.4 ± 0.1	mm	A.S.T.M. - D 1777
Efficiency					
Penetration (0.3 um NaCl @32 L/m)	20 ± 0.5	%	20 ± 0.5	%	TAPPI 251
Air Resistance (@32 L/m)	0.5 ± 0.05	mmH ₂ O	4.6 ± 0.5	Pa	TAPPI 251
Air Permeability (@125 Pa)	292 ± 2.9	cfm	138 ± 1.4	l/m ² s	TAPPI 251
Color	White				

Resistance and efficiency were tested using TSI 8130 and air permeation was tested using the Textest FX 3300

Disclaimer: The material properties described in this document are estimates only and are not warranted by eSpin Technologies, inc. The data sheet is to be used as a guide only. eSpin retains all intellectual property rights to this material and related trade mark.

 info@eSpintechnologies.com
 (423) 267-6266

 7151 Discovery Drive
 Chattanooga, TN 37416

